




## Sure Tac™

**PRODUCT DESCRIPTION:** Sure Tac™ is a 23µ (0.9 mil) clear polyester mounting film coated on both sides with a pressure sensitive, solvent acrylic adhesive which is protected by a bleached Kraft differential release paper (moisture stable) coated on both sides with siliconised polyethylene. Available in various sizes.

**SUGGESTED APPLICATIONS:** Sure Tac™ is a versatile adhesive, compatible with a wide variety of media and substrates. Its solvent acrylic adhesive offers a stable and permanent band for outdoor use.

### PRODUCT STRUCTURE:

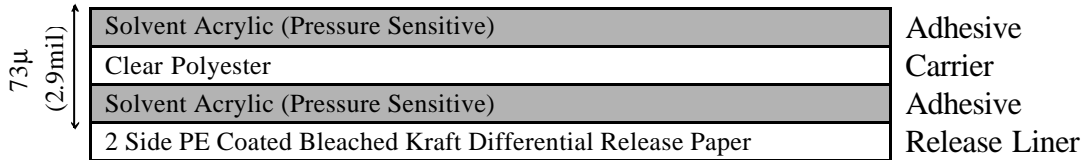

### GENERAL PROPERTIES:

*Film Thickness:* 23µ (0.9mil)  
*Adhesive Layer:* 30µ (1 mil) on each side  
*Ratio Film/Adhesive:* 0.45/1  
*Heat Resistance Range:* Up 130°C (266°F)  
*Peel Strength (20 min, FTM1):* 23 N/25mm

### PROCESS SETTINGS:

ROLLER LAMINATOR	PRESS
<i>Temperature:</i> Room Temperature to 49°C (120°F) <i>Speed:</i> 0.3m to 2.5m (1 ft to 8 ft) per minute	NOT RECOMMENDED

Specifications subject to change without notice.

Published information concerning Drytac products is based upon research which the company believes to be reliable and accurate. Such information is intended only as a guide and is given without guarantees. Purchasers should independently determine, prior to use, the suitability of each material for their specific purpose. Drytac does not accept liability for risks associated with the performance of the materials in application. All Drytac products are subjected to carefully quality control throughout the manufacturing process and are sold subject to Drytac standard conditions of sale.

**Drytac Europe Ltd (UK)** – Drytac House, Filwood Road, Fishponds, Bristol, BS16 3RY, UK.

Tel: +44 (0) 845-070-0660

**Drytac Corp. (USA)** – 5383 Glen Alden Drive, Richmond, Virginia 23231, USA.

Telephone: 1-800-603-6610

**Drytac Canada Inc. (Canada)** – 137 Buttermill Avenue, Concord, Ontario, L4K 3X5, Canada.

Telephone: 1-800-353-2883

[www.drytac.com](http://www.drytac.com)